

## iTrans WP70HBC

2 x 1 USB-C & HDMI over HDBT 3.0 Wall Plate Extender Kit (Tx + Rx)

*Datasheet V1.0*



# Table of Contents

<b>1.0 OVERVIEW.....</b>	<b>3</b>
1.1 iTRANS WP70HBC (Tx) .....	3
1.2 iTRANS WP70HBC (Rx) .....	3
<b>2.0 FEATURES .....</b>	<b>3</b>
2.1 iTRANS WP70HBC (Tx) .....	3
2.2 iTRANS WP70HBC (Rx) .....	4
<b>3.0 SPECIFICATIONS.....</b>	<b>5</b>
3.1 iTRANS WP70HBC (Tx) .....	5
3.2 iTRANS WP70HBC (Rx) .....	6
<b>4.0 TRANSMISSION DISTANCE .....</b>	<b>7</b>
<b>5.0 PANEL DESCRIPTION .....</b>	<b>8</b>
5.1 iTRANS WP70HBC (Tx) .....	8
5.2 iTRANS WP70HBC (Rx) .....	12
<b>6.0 WIRING.....</b>	<b>14</b>

# 1.0 OVERVIEW

## 1.1 iTrans WP70HBC (Tx)

This **iTrans WP70HBC (Tx)** is a 2 x 1 wall plate transmitter equipped with both USB-C and HDMI inputs. It adopts the latest **HDBT 3.0** technology, allowing for fully uncompressed video transmission of **4K@60Hz 4:4:4 8-bit** SDR and **4K@60Hz 4:2:2 12-bit** HDR signal. It supports simultaneous transmission of **video, audio, USB 2.0**, control signals, and power up to 40m/131ft through a single Cat 6A or higher cable. It complies with the **2-gang US standard**, making it easy to install on walls or desks. Additionally, it supports **automatic and manual** (button & API) **switching** between the inputs of USB-C and HDMI + USB-B. The USB-C port is designed as a full-featured port that supports transmission of **video, data**, and **60W** charging (when connected to a local power adapter).

This product is PoH+ (Power over HDBaseT) capable that allows itself to be recharged by the remote receiver (Model **iTrans WP70HBC (Rx)**) via a category cable, and no additional power adapter is required. Moreover, it features 60W charging of the attached USB-C computer when connected to an external power adapter.

## 1.2 iTrans WP70HBC (Rx)

This **iTrans WP70HBC (Rx)** is an **HDBT 3.0** receiver designed to work with an HDBT 3.0 transmitter (**iTrans WP70HBC (Tx)**) to transmit **uncompressed 4K UHD** video, high-speed **USB 2.0** signals up to **40m/131ft** along a Cat 6A or above cable. It supports a maximum of **4K@60Hz 4:4:4 8bit** resolution. With one-way **PoH+** support, it can provide power to the remote transmitter. It also features one independent **audio pass-through** and one **audio de-embedded** output. RS232 port allows for device control and firmware update.

This receiver is ideal in scenarios where USB signals are extended along with HDMI to realize interactions with displays such as interactive whiteboards or projectors.

# 2.0 FEATURES

## 2.1 iTrans WP70HBC (Tx)

- 2 x 1 wall plate switch transmitter over **HDBT 3.0** platform.
- Supports **automatic and manual switching** (button & API commands) between the inputs of USB-C and HDMI + USB-B.
- **Full-featured USB-C** input allows for 4K video and USB data delivery and **60W** charging\*.
- HDMI 2.0 input supports video resolutions up to **4K@60Hz 4:4:4 8bit** and **HDCP 2.2**.
- Supports transmission of **4K@60Hz 4:4:4 8bit** signal up to **40m/131ft** and of **4K@30Hz 4:4:4 8bit** signal up to **70m/230ft** via a Cat 6A or above cable.
- An additional **analog pass-through** channel allows for independent audio distribution to the HDBT receiver.
- High-speed **USB 2.0 pass-through** with data rate up to 300Mbps.
- The RS232 port supports command pass-through, API control and firmware update.
- **PoH+ PD** function enables the transmitter to be powered by an HDBT receiver.
- Supports control of the display on/off through **CEC**.

\*Note: The USB-C 60W charging requires an additional power adapter to be connected to the wall plate transmitter.

## 2.2 iTrans WP70HBC (Rx)

- Supports video resolutions up to **4K@60Hz 4:4:4 8bit**.
- **HDCP 2.3** and backwards compatible.
- Supports transmission of **4K@60Hz 4:4:4 8bit** signal up to **40m/131ft** and of **4K@30Hz 4:4:4 8bit** signal up to **70m/230ft** via a Cat 6A or above cable.
- An additional **analog pass-through** channel allows for independent audio transmission.
- High-speed **USB 2.0** pass-through with data rate up to 300Mbps.
- Provides **DIP switch** for configuration of RS232 function.
- Supports **PoH+** to power the remote transmitter that is with PD module.
- Supports device control and firmware update through RS-232 port.
- Supports **CEC** commands pass-through.

## 3.0 SPECIFICATIONS

### 3.1 iTrans WP70HBC (Tx)

Technical	
Input	1 x HDMI IN, 1 x USB-C IN
Output	1 x HDBT OUT
Input/Output Video Singal	<p>Input:</p> <ul style="list-style-type: none"><li>• HDMI up to 4K@60Hz (4:4:4 8-bit), HDCP 2.2;</li><li>• USB-C Up to 4K@60Hz (4:4:4 8-bit), HDCP 2.2</li></ul> <p>Output: HDBT</p>
Input/Output Resolutions Supported	<p>HDMI/USB-C/HDBT:</p> <p>4096 x 2160<sup>2,5,6,7,8</sup>(YUV 4:4:4), 3840 x 2160<sup>2,5,8</sup>(YUV 4:4:4), 2560x1600<sup>8</sup>, 2560x1440<sup>8</sup>, 1920x1200<sup>8</sup>, 1920x1080P<sup>8</sup>, 1680x1050<sup>8</sup>, 1600x1200<sup>8</sup>, 1600x900<sup>8</sup>, 1440x900<sup>8</sup>, 1366x768<sup>8</sup>, 1360x768<sup>8</sup>, 1280x1024<sup>8</sup>, 1280x960<sup>8</sup>, 1280x800<sup>8</sup>, 1280x768<sup>8</sup>, 1280x720<sup>8</sup>, 1024x768<sup>8</sup>, 800x600<sup>8</sup></p> <p>1 = at 23.98 Hz, 2 = at 24 Hz, 3 = at 25 Hz, 4 = at 29.97 Hz, 5 = at 30 Hz, 6 = at 50 Hz, 7 = at 59.94 Hz, 8 = at 60 Hz</p>
Maximum Data Rate	18Gbps
Audio Format	<ul style="list-style-type: none"><li>• HDMI IN / USB-C IN: Supports multi-channel audio formats, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio and DTS:X</li><li>• LINE IN-P: Stereo</li></ul>

General	
Operating Temperature	0°C to 45°C (32°F to 113°F)

General	
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	10% to 90%, non-condensing
ESD Protection	Human-body Model: ±8kV (Air-gap discharge) / ±4kV (Contact discharge)
Power Supply	<ul style="list-style-type: none"> <li>PoH+</li> <li>DC 20V 6A (optional, for USB-C charging)</li> </ul>
Power Consumption (Max)	<ul style="list-style-type: none"> <li>6.6W (USB-C charging not included)</li> <li>71.6W (USB-C charging included)</li> </ul>
Device Dimension	89mm x 105.6mm x 36.25mm / 3.5" x 4.16" x 1.43" (W x H x D)
Product Weight	0.36kg/0.79lb

## 3.2 iTrans WP70HBC (Rx)

Technical	
Input	1 x HDBT IN
Output	1 x HDMI OUT
Input/Output Video Singal Type	Input: HDBT Output: HDMI up to 4K@60Hz (4:4:4 8-bit), HDCP 2.3
Input/Output Resolutions Supported	HDMI/HDBT: 4096 x 2160 <sup>2,5,6,7,8</sup> (YUV 4:4:4), 3840 x 2160 <sup>2,5,8</sup> (YUV 4:4:4), 2560x1600 <sup>8</sup> , 2560x1440 <sup>8</sup> , 1920x1200 <sup>8</sup> , 1920x1080P <sup>8</sup> , 1680x1050 <sup>8</sup> , 1600x1200 <sup>8</sup> , 1600x900 <sup>8</sup> , 1440x900 <sup>8</sup> , 1366x768 <sup>8</sup> , 1360x768 <sup>8</sup> , 1280x1024 <sup>8</sup> , 1280x960 <sup>8</sup> , 1280x800 <sup>8</sup> , 1280x768 <sup>8</sup> , 1280x720 <sup>8</sup> , 1024x768 <sup>8</sup> , 800x600 <sup>8</sup>

Technical	
	1 = at 23.98 Hz, 2 = at 24 Hz, 3 = at 25 Hz, 4 = at 29.97 Hz, 5 = at 30 Hz, 6 = at 50 Hz, 7 = at 59.94 Hz, 8 = at 60 Hz
Maximum Data Rate	18Gbps
Audio Format	<ul style="list-style-type: none"> <li>HDMI OUT: Supports multi-channel audio formats, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio and DTS:X</li> <li>LINE OUT-P/AUDIO OUT: Stereo</li> </ul>

General	
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	10% to 90%, non-condensing
ESD Protection	Human-body Model: ±8kV (Air-gap discharge) / ±4kV (Contact discharge)
Power Supply	DC 20V 3A
Power Consumption (Max)	10.92W
Device Dimension (W x H x D)	212.5mm x 25mm x 110mm / 8.37" x 0.98" x 4.33"
Product Weight	0.46kg/1.01lbs

## 4.0 TRANSMISSION DISTANCE

- Straight-through category cable wired to T568B standard is recommended.


- For a maximum of HDMI 2.0 resolution, Cat 6A U/FTP, F/FTP or S/FTP cable is recommended.

Cable Type	Transmission Distance (Max)	Supported Video
Cat 5e/6	60m/197ft	4K@60Hz 4:2:0 24bpp 4K@30Hz 1080P@60Hz
	40m/131ft	4K@60Hz 4:4:4 24bpp 4K@60Hz 4:2:2 36bpp 4K@60Hz 4:2:0 36bbp
Cat 6A or 7 (U/FTP, F/FTP or S/FTP)	70m/230ft	4K@60Hz 4:2:0 24bpp 4K@30Hz 1080P@60Hz
	40m/131ft	4K@60Hz 4:4:4 24bpp 4K@60Hz 4:2:2 36bpp 4K@60Hz 4:2:0 36bbp

## 5.0 PANEL DESCRIPTION


### 5.1 iTrans WP70HBC (Tx)



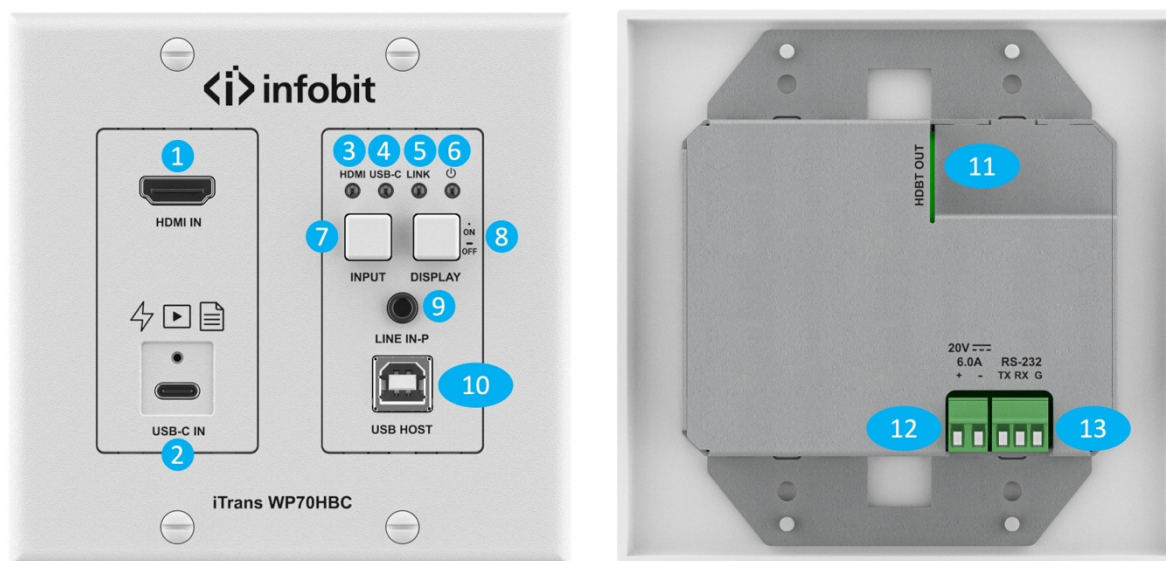


#	Name	Description
1	HDMI IN	Connect to an HDMI source.
2	USB-C IN	<p>Connect to a USB-C source (e.g. laptop).</p> <p>Note:</p> <ul style="list-style-type: none"> <li>This port is a full-featured USB-C port that supports USB 2.0, 4K@60Hz video and charging up to 60W.</li> <li>For charging of a device through the USB-C port, connect a power adapter to the transmitter.</li> <li>Recommended cable: USB-C to USB-C cable that supports USB 3.2 Gen 1 or above.</li> </ul>
3	HDMI LED	<ul style="list-style-type: none"> <li>On: HDMI source is selected.</li> <li>Off: HDMI source is not selected.</li> </ul>
4	USB-C LED	<ul style="list-style-type: none"> <li>On: USB-C source is selected.</li> <li>Off: USB-C source is not selected.</li> </ul>
5	LINK LED	<ul style="list-style-type: none"> <li>On: HDBT link is normal.</li> <li>Off: No HDBT link or link error.</li> </ul>
6	Power LED	<ul style="list-style-type: none"> <li>On: The device is powered on.</li> <li>Off: The device is powered off.</li> </ul>

#	Name	Description
7	INPUT	Input selection button. Press to select an input source between HDMI and USB-C channels.
8	DISPLAY	Button of controlling display on/off. <ul style="list-style-type: none"> <li>• Short press: To turn on the display device.</li> <li>• Press and hold for at least 3 seconds: To turn off the display device.</li> </ul>
9	LINE IN-P	Connect to an audio source for analog audio passes through to the receiver.
10	USB HOST	Connect to a USB host (e.g. PC) using the USB-A to USB-B cable provided. Note: This port is bound to the HDMI IN port, when HDMI IN is selected as the input channel, the USB peripheral devices will be linked to the USB host device.
11	HDBT OUT	Connect to the HDBT IN port of a receiver.
12	20V	Connect to a DC 20V 6A power adapter (sold separately). Note: For charging of a device through the USB-C port, you must connect a 20V/6A power adapter to this port.
13	RS232	Connect to an RS232 device for device control or firmware update. <b>Note:</b> Only the MCU firmware of the transmitter can be updated through this port, the Valens firmware needs to be updated through the connected receiver.

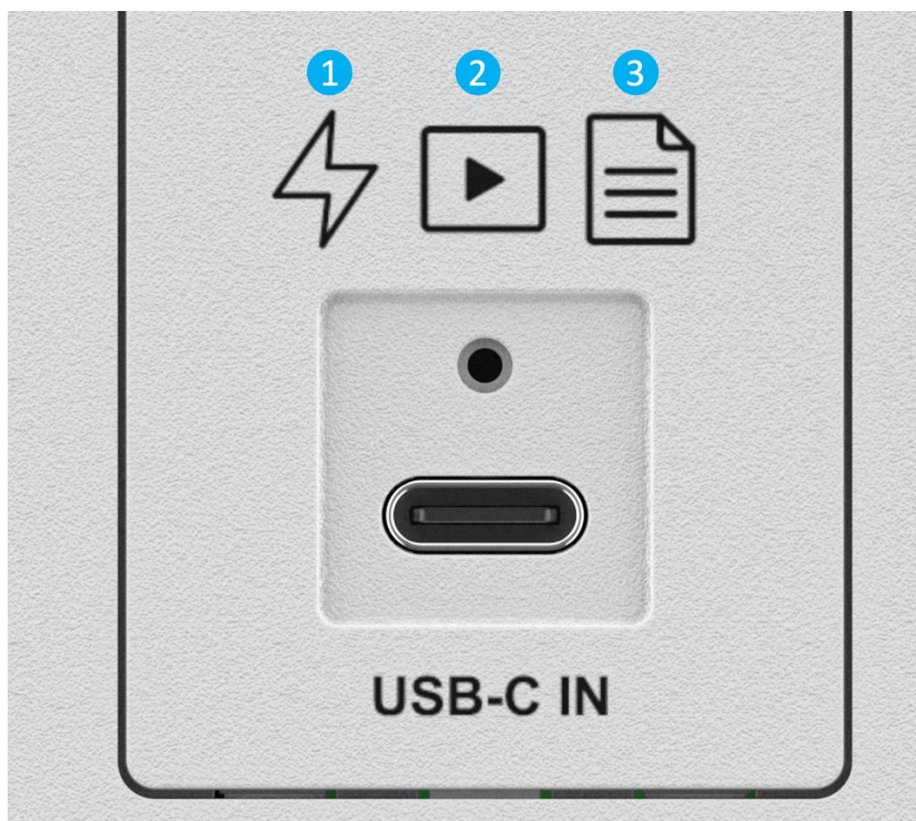


USB C Labels	Description
1	<b>PD (Power Delivery):</b> It supports charging up to 60W to the PC.
2	<b>AV (Audio Video):</b> It supports audio and video transmission.
3	<b>Data (USB data):</b> It support USB 3.2 Gen 1

## DIMENSION

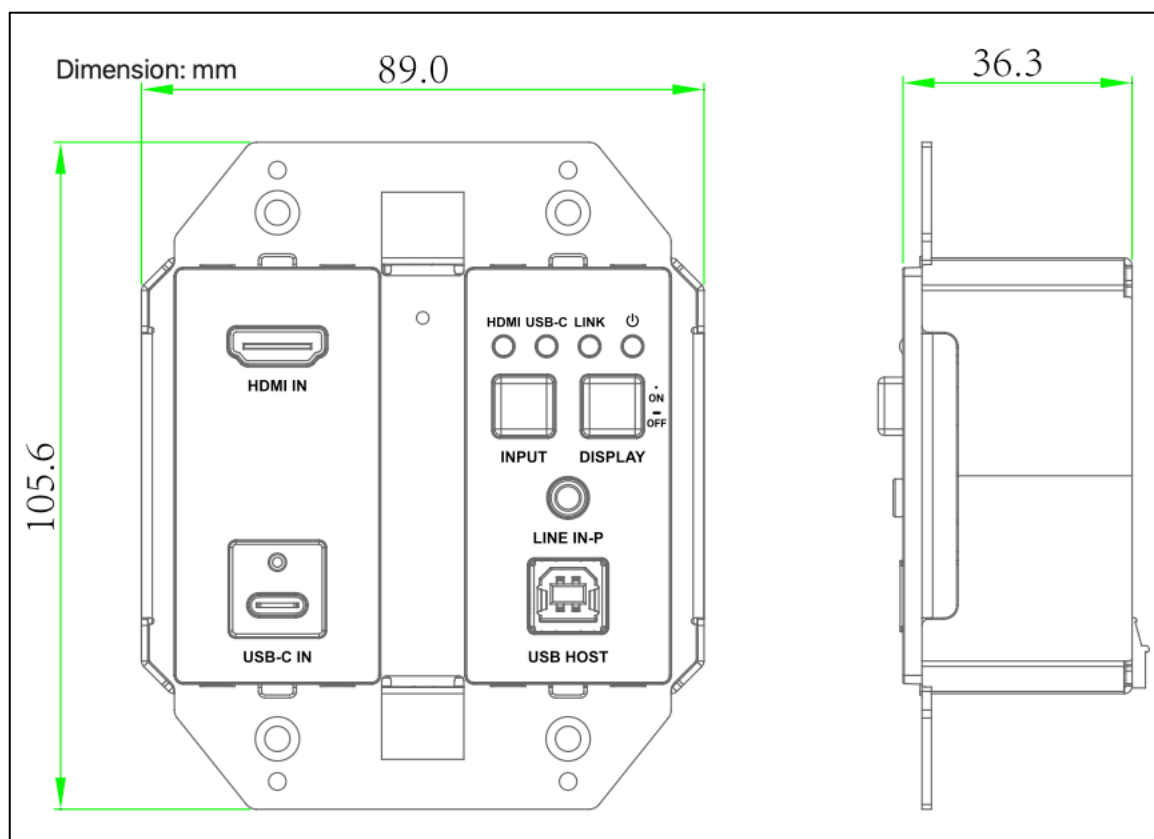

## 5.2 iTrans WP70HBC (Rx)


### Front Panel

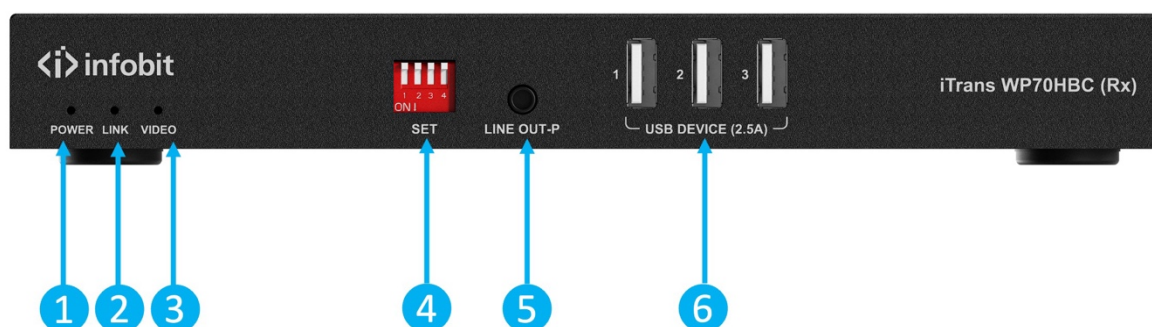

#	Name	Description
1	Power LED	<ul style="list-style-type: none"> <li>On/Off: The device is powered on/off.</li> </ul>

#	Name	Description
2	LINK LED	<ul style="list-style-type: none"> <li>On: HDBT link is normal.</li> <li>Off: No HDBT link or link error.</li> </ul>
3	VIDEO	<ul style="list-style-type: none"> <li>On: Valid video signal is being output.</li> <li>Off: No video signal output.</li> </ul>
4	SET	DIP Switch for configuration of RS232 function. For more information refer to DIP Switch Configuration section.
5	LINE OUT-P	Connect to an audio receiver for passing through the analog audio from the transmitter.
6	USB DEVICE (2.5A)	USB 2.0 Type-A ports. Connect to USB devices such as USB camera, mouse and keypad.

#### Rear Panel

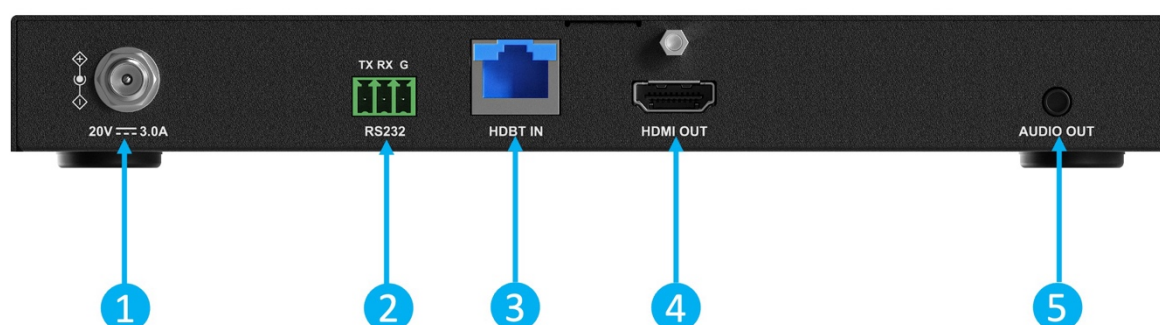


#	Name	Description
1	20V	Connect to the power adapter provided. With one-way PoH+ function support, the receiver can recharge the connected transmitter.
2	RS232	<p>Connect to an RS232 device for controlling the receiver, passing through RS232 commands or for firmware upgrade.</p> <p>Note: RS232 function can be configured through the DIP switch, for more information refer to DIP Switch Configuration section.</p>

#	Name	Description
3	HDBT IN	Connect to the HDBT OUT port of a transmitter.
4	HDMI OUT	Connect to an HDMI display.
5	AUDIO OUT	Connect to an audio receiver for audio de-embedding from HDMI OUT.

## 6.0 WIRING

### Warnings:

- Before wiring, disconnect the power from all devices.
- During wiring, connect and disconnect the cables gently.

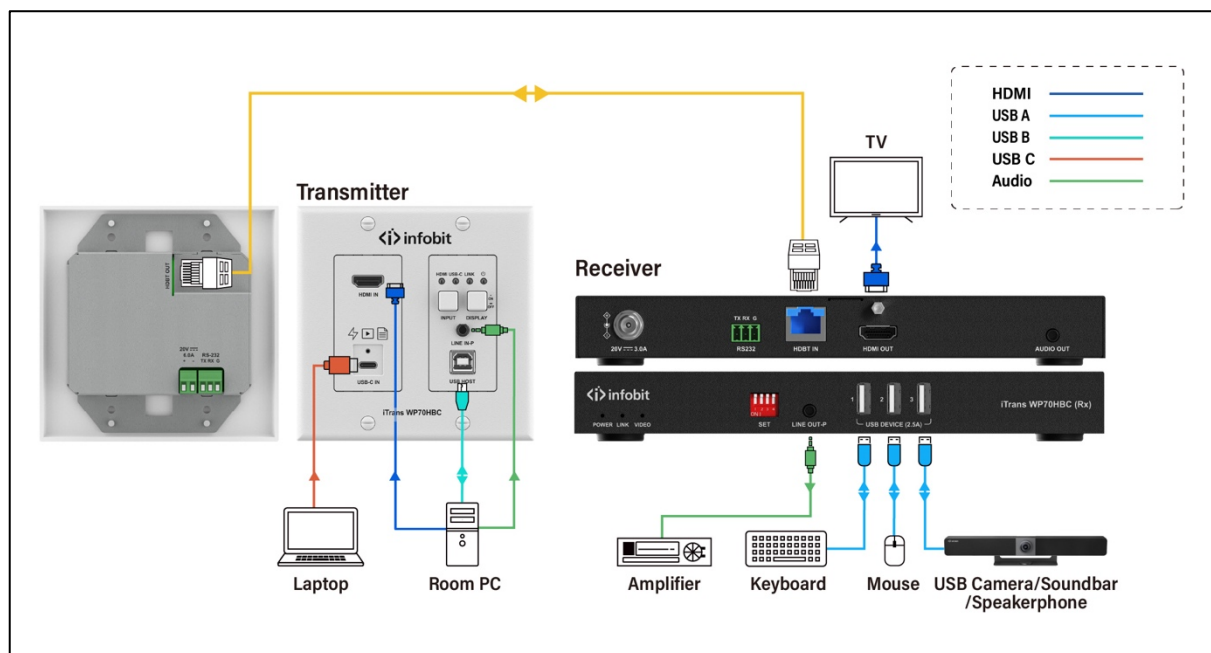

To connect for RS232 control or firmware update:

Connect a PC to RS232 port of the receiver and toggle the DIP switch between up and down positions, then you can send commands to the receiver to either control the receiver as well as the remote transmitter or perform firmware upgrade.