


iTrans

One Cable Station (OCS) 13 in 1

Model: iTrans OCS 131

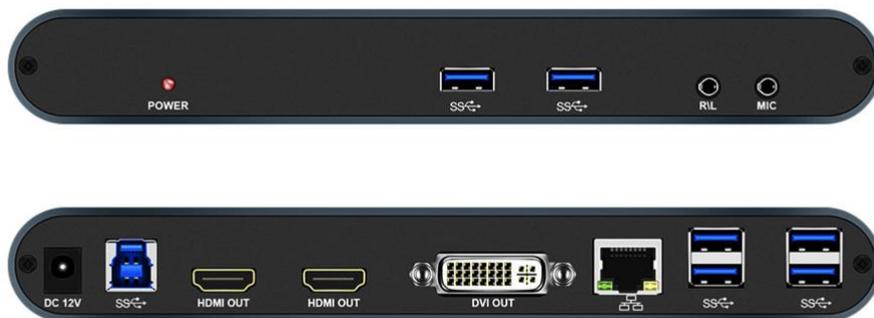

Datasheet 21V1.0

- This product cannot charge the laptop, you need an external charger for the system powered by.
- This product has two HDMI ports and one DVI port, if necessary, we also include a DVI to VGA adapter and a DVI to HDMI adapter.
- This product is not compatible with DisplayPort monitors.
- The two HDMI output interfaces can only display the same picture, not same picture.
- Please connect this product to the USB3.0 interface of the computer

to ensure the expansion the 6x USB interface reaches the speed standard of 3.0.

- Drive download address: <https://www.displaylink.com/downloads>
- The DisplayLink software driver is inbuilt with ChromeOS from build R51 (released in June 2016). All Chromebooks using ChromeOS build R51 or later will work with DisplayLink docks and adapters without additional driver installation.
- This product does not support Windows XP (64bit), Vista (64bit) system.
- After connecting and using the 3.5mm stereo output interface, there will be no sound output from OUTA and OUTB.
- The output HDMI cable cannot exceed 5 meters, please use high-quality standard cable.

Description:

Keep your tabletop clean and organized

The iTrans OCS 131 offers a one-cable laptop link to a room's conference camera and devices, making it easy for teams to meet, present, and stream over any service.

It integrates beautifully with your meeting rooms. Keep the tabletop clean and organized with the compact hub, or route the OCS through an existing cable well.

This product can expand the USB3.0 interface of the notebook computer to 12 additional interfaces in one stop, and only need a USB cable to connect peripheral devices to the notebook computer, effectively solving the problem of insufficient interfaces caused by the portable design of the computer.

This product can add a DVI monitor and two HDMI monitors with the same picture, which can maximize improve the working efficiency and expand working space. Very suitable for office use, such as e-mail, Web applications, Microsoft Office, etc.

The front of this product is designed with USB interface, stereo output interface and microphone input interface, which is convenient for frequent insertion and removal every day.


Features:

- Support Windows 7, 8, 8.1, 10, XP (32bit), Vista (32bit), macOS, Chrome OS system
- Support 1 USB input.
- Support 3.5mm stereo output.
- Support 1 microphone input.
- Support 2 HDMI outputs, can only display the same picture.
- Support 1 DVI output.
- Support 6 USB3.0 outputs.
- Support 1 channel RJ45 network port.
- The output resolution is up to 1920 * 1080P / 60Hz.


Specification:

USB interface USB TYPE-A
USB version USB2.0, USB3.0
Output resolution1920x1080 @ 60Hz
Output cable distance<= 5m (AWG26 standard HDMI1.4 cable)
Range of working temperature.....(- 15 to + 55 ° C)
Operating humidity rangeto 90% RH (non-condensing)
Bare metal size 210x76x26(mm)
Bare metal weight 1,100g
Shell material.....metal
Color.....gray

Interface diagram:

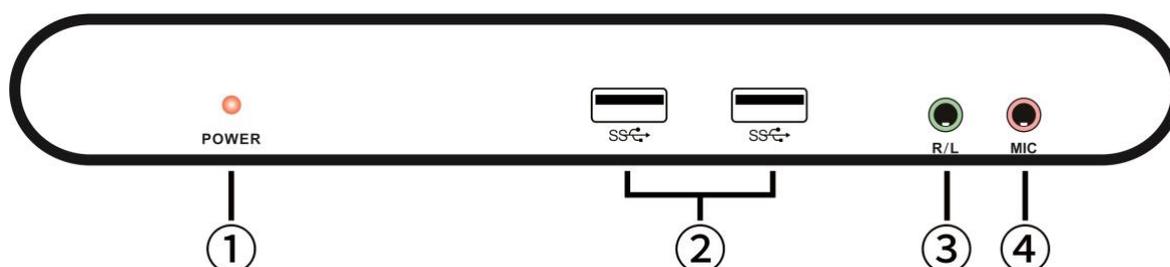

- ① The power indicator lights up when it is properly connected to the USB3.0 port of the computer.
- ② USB interface, connect USB interface devices such as U disk and printer.
- ③ 3.5 stereo output interface, can be connected to headphones or stereo sound system.
- ④ Microphone input interface, can connect the microphone of 3.5mm plug.

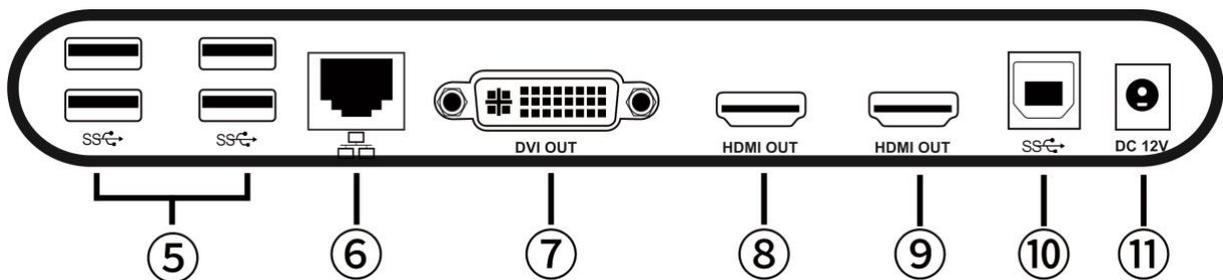

- ⑤ USB interface, connect USB interface device such as U disk, printer.
- ⑥ RJ45 network port, connect to router.
- ⑦ DVI output interface, connect to DVI monitor, you can also use DVI to VGA adapter to connect to VGA monitor.
- ⑧ HDMI output interface, connect the display with HDMI interface.
- ⑨ HDMI output interface, connect the display with HDMI interface.

Note: ⑧ ⑨ Two HDMI output interfaces can only display the same picture!

- ⑩ USB HOST interface, use USB cable to connect to the computer's USB3.0 interface.
- ⑪ Power input interface, connect 12V 4A power adapter.

Connection and use diagram:

