




# iSound 88D

8x8 Digital Sound Processor w/ Dante

*Datasheet V1.0*

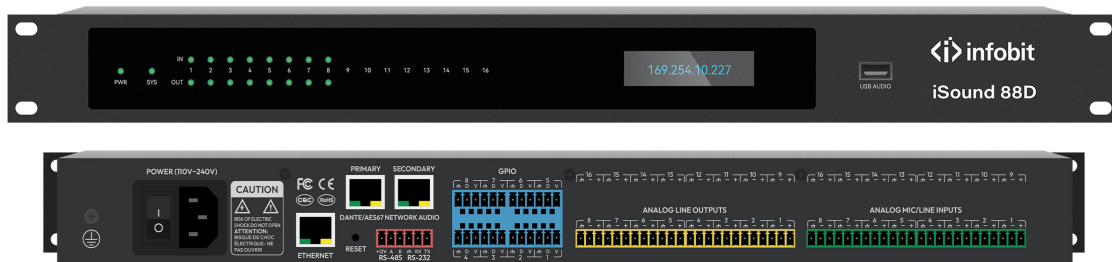

## Introduction:

INFOBIT's iSound 88D is a Dante enabled, digital audio DSP with Analog I/O. This fully networked professional audio product is ideal complement to INFOBIT's iSwitch Video over IP solutions for House of Worship, Bars and Restaurants, Conferencing, and Education markets.



The iSound ecosystem of products are purpose built to deliver pristine audio throughout the network while significantly reducing traditional device count and cabling costs.

The iSound products use the industry-leading ADI 450Mhz SHARC 21489 chip and provides outstanding 24bit/48kHz audio quality. The series has the best 5A DSP algorithms in the industry including:

- AFC (Adaptive Feedback Control)
- AEC (Acoustic Echo Cancellation)
- ANS (Automatic Noise Suppression)
- ANC (Ambient Noise Compensation)
- AGC (Automatic Gain Control)
- Gain Sharing AutoMix

The iSound 88D is power packed DSP which features 8x8 Dante along with 8x8 Analog I/O. It is perfect for medium to large applications where more analog I/O is needed.

## Features

- ADI SHARC 21489 processor
- 8 balanced microphone or line level inputs on Terminal Block connectors
- 8 balanced line level outputs on Terminal Block connectors
- 2 Dante audio interfaces on RJ-45 connectors
- 8 GPI/O multi-function ports on Terminal Block connectors
- Dante audio channels up to 8x8
- Defnable GUI for managing and configuring multiple units
- All Inputs and Outputs support a full suite of audio shaping tools including graphic and parametric EQ, dynamics, ducker, delay and more
- 16 preset slots to store all configuration data for easy recall
- Built-in USB sound card for recording and playing digital audio
- DSP Configurator software tool for managing all audio operations
- Supports adaptive echo cancellation (AEC), adaptive feedback control (AFC), automatic gain control (AGC), automatic mixture control (AMC), automatic noise suppression (ANS)

## Applications

- Higher Education
- Bar or restaurant
- Large or complex conference rooms

Dante® is a registered trademark of Audinate Pty Ltd.

## Spec

<b>Model</b>	iSound 88D
<b>Name</b>	4x4 Digital Sound Processor w/ Dante
<b>Audio</b>	
<b>ADSP</b>	ADI SHARC 21489 (×1)
<b>Audio Format</b>	24 bits, 48 kHz sampling rates (uncompressed)
<b>System Latency</b>	< 3 ms
<b>Analog I/O Channels</b>	8x8
<b>Dante I/O Channels</b>	8x8
<b>Analog Input Gain</b>	0, 10, 20, 30, 40, 43 dB
<b>Analog Input Level</b>	+24 dBu
<b>Analog Output Level</b>	+24 dBu
<b>Frequency Response</b>	±0.2 dB (20 Hz to 20 kHz)
<b>THD+N</b>	< 0.003% (1 kHz, +4 dBu)
<b>Common Mode Rejection Ratio</b>	80 dB (60 Hz)
<b>SNR</b>	110 dB
<b>Analog Dynamic Range</b>	113 dB
<b>Dante Dynamic Range</b>	115 dB
<b>Analog Background Noise</b>	-89 dBu (A-weighted)
<b>Dante Background Noise</b>	-91 dBu (A-weighted)
<b>Channel Isolation</b>	108 dB (1 kHz)
<b>Input Impedance</b>	9.4k ohms (Balanced)
<b>Output Impedance</b>	102 ohms (Balanced)
<b>Phantom Power</b>	48 V

Interface	
Input Port	8 Analog Audio (Terminal Block)
Output Port	8 Analog Audio (Terminal Block)
Ethernet Port	2 Dante Audio (RJ-45) 1 LAN (RJ-45)
USB Port	1 USB Audio (Type-A)
Serial Port	1 RS-232 (Terminal Block) 1 RS-485 (Terminal Block)
GPI/O Port	8 GPI/O (Terminal Block)
Power	
AC Power	110 to 240 VAC at 50 or 60 Hz
AC Adapter	N/A
Power Consumption	25 W
Enclosure	
Chassis Material	Metal
Chassis Color	Black
Chassis Dimensions (Height×Width×Depth)	45×482×260 mm
Chassis Weight	3 kg
Environment	
Operating Temperature	+32 to +104 °F (0 to +40 °C)
Humidity	10% to 90% RH (non-condensing)
Compliance	
Regulatory Compliance	FCC, CCC, CE, RoHS