

Speaker



iSpeaker DAC6S



iSpeaker DAC6S

1x6.5"+1x1" dome ·
Output power of 60W ·
Rated power (8Ω fixed resistance): 60W ·
Easy wiring: Front-out wiring cable raceway ·
Supports Dante ·


- Sensitivity of 93dB
- Designed with 8x N42 high-strength magnets.
- With anti-dropping rope.
- Suitable for narrow ceiling spaces.
- Supports PoE: 802.3af/802.3at/802.3bt

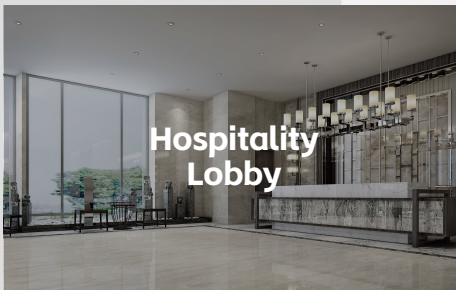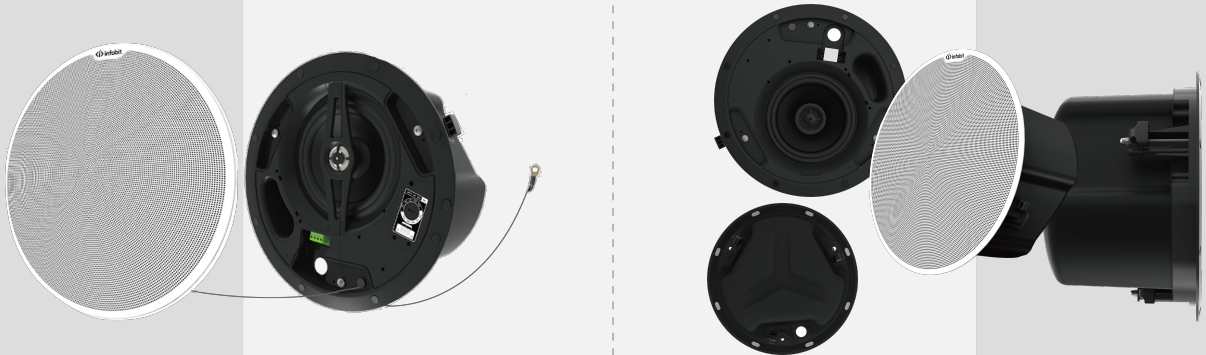

Hospitality
Lobby



Meeting
Rooms

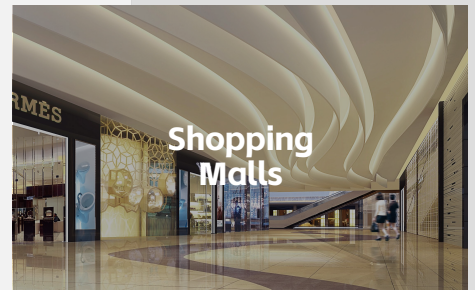


Shopping
Malls



Conference
Halls



Education
Classrooms

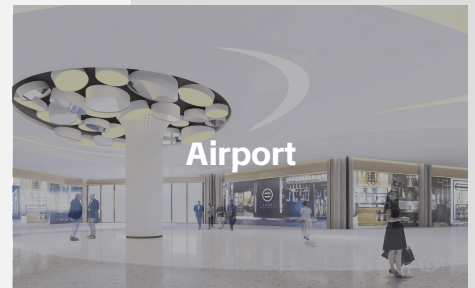

Airport

