

# Presentation Switcher

## iSwitch 402UC



**RJ-45**  
2x2 Dante

Arbitrarily

overlay, resize  
move, overlap

**4K60Hz**


**RS 232**

- 4K Video: resolutions up to 4K60Hz 4:4:4.
- 4x2 conference presentation switcher, integrating video, audio, USB, control, and Ethernet.
- Dual USB-C and dual HDMI + USB Host inputs.
- Full-featured USB-C inputs, supports 4K video, USB 3.2 data, USB ethernet, and 60W charging.
- With 100m HDBT 3.0 output for video and USB extension.
- Bi-directional RS232
- GPIO, RELAY, and OCS Sensor
- Each input port provides an independent USB to Ethernet bridge.
- Provides two independent RJ-45 ports for ethernet switch or VLAN Setting.
- Supports one RJ-45 port for 2x2 Dante.
- Supports ethernet control, and multiple simultaneous TCP/IP.
- IT security: supports HTTP and HTTPS and supports 802.1x authentication.



### Dante Ready & Dual Fully-featured USB C

Supports one RJ-45 port for 2x2 Dante.  
supports 4K video, USB 3.2 data, USB ethernet and 60W charging. It provides power delivery (PD) of up to 60 W for the connected device (e.g. BYOD laptop or smartphone).

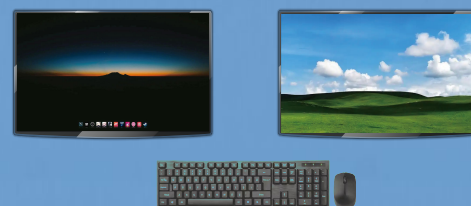

### With HDBaseT Receiver

The iSwitch 402UC (Rx) is an HDBT 3.0 extender based on the new generation of HDBT 3.0 platform, which can transmit the uncompressed HDMI2.0 video signal up to 4K@60Hz 4:4:4.



SCAN FOR CATALOG