

■ ■ THE INFOBIT VOICE-TRACKING ROOM

Every Voice Seen. Every Word Heard.

The meeting room that runs itself.



Back in the Office. Still on Calls.

Employers have called everyone back

Every returning employee still meets remote colleagues

Remote attendees can't tell who is speaking

Far seats go unheard; someone always adjusts the camera





Speak. The Room Does the Rest.

THE CAMERA LOOP



THE SOUND LOOP



Sit Anywhere. Just Talk.

01

Walk in

the room is ready

02

Speak from any seat

you're on camera

03

Finish

nobody touched a thing



The Camera Always Shows the Speaker.




Speak, and you're framed — instantly, hands-free

Up to 8 pickup zones, each perfectly framed

Steady, deliberate shots — no hunting mid-meeting


Remote colleagues feel like they're at the table

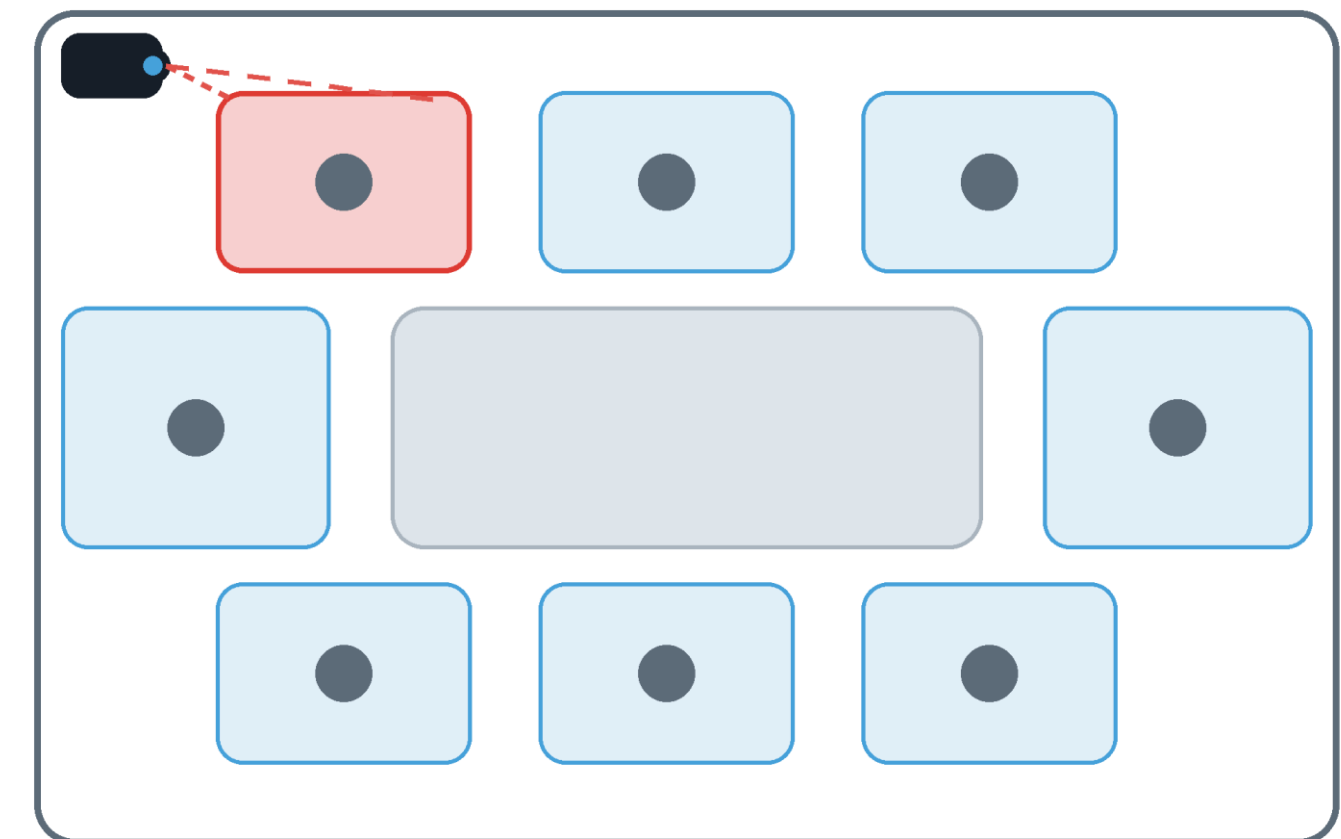

 SPEAKING NOW

 PICKUP ZONES

Every Seat Heard. No Table Clutter.

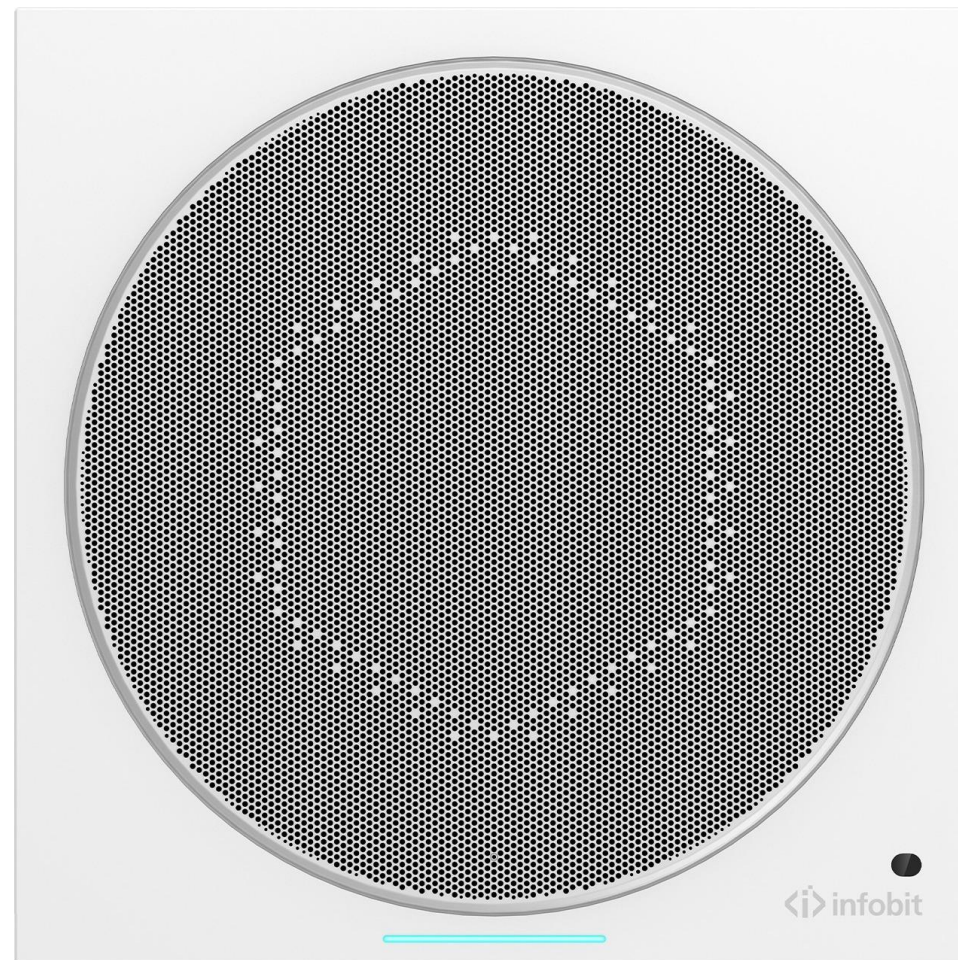

ISPEAKER CM360 — CEILING MICROPHONE



One ceiling microphone hears the whole room

Echo cancellation built in — no talking over echoes

No mics to pass, no cables on the table

Quiet voices at the far end come through



Felt, Not Heard.



Gentle in-room voice lift from ceiling speakers

The back row hears clearly — nothing sounds amplified

Presenters speak naturally; no straining, no shouting



ISPEAKER DAC6S — POE CEILING SPEAKER



One Touch Runs the Room.




One elegant 6.9" touch panel on the wall

Meeting. Presentation. Music. One tap each.


No AV training, no support tickets

Every room works exactly the same way

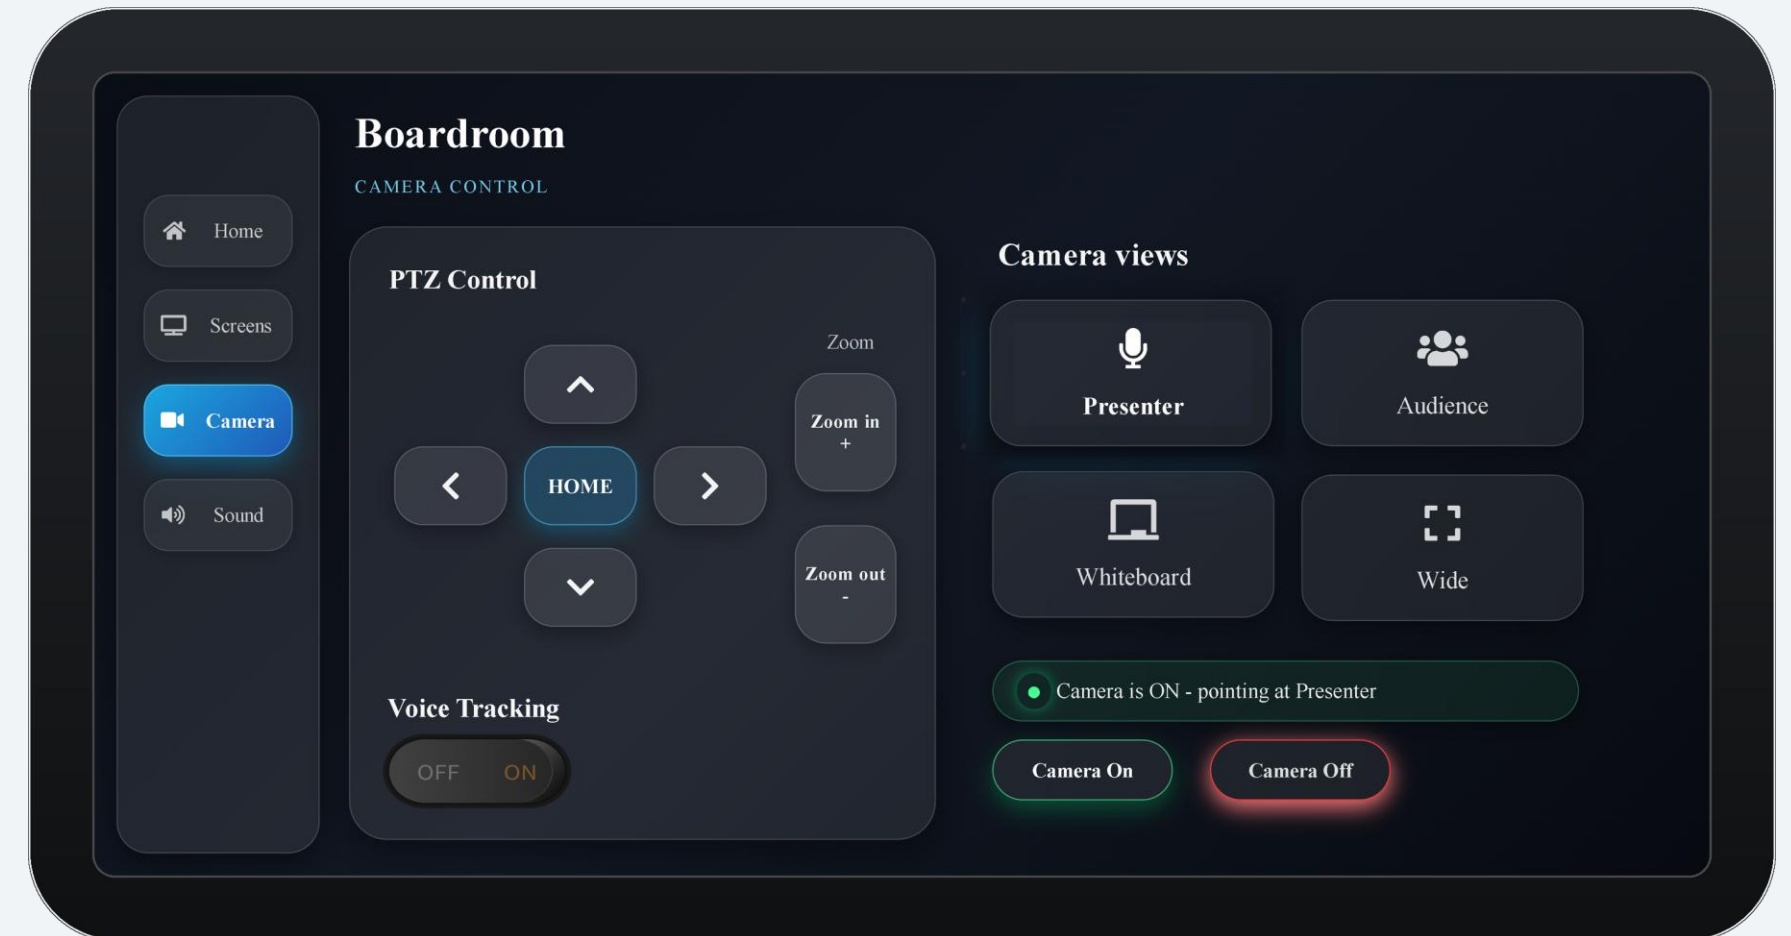

ICONTROL KT069 — 6.9" TOUCH PANEL

Five Products. One Complete Room.

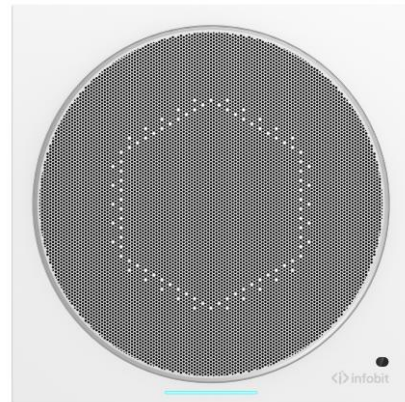

iSpeaker CM360

Ceiling microphone that hears and locates every speaker.




iSound 88D

Audio processor managing every voice, echo-free.




iCam P30

PTZ camera with instant, steady preset framing.

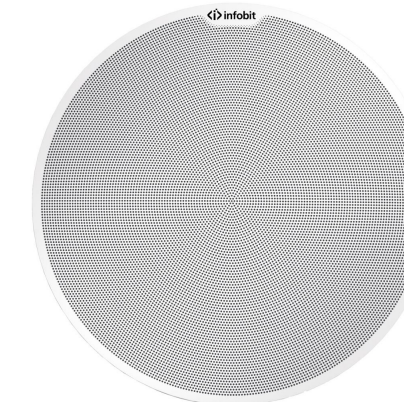

iSpeaker DAC6S


PoE ceiling speakers; one network cable each.

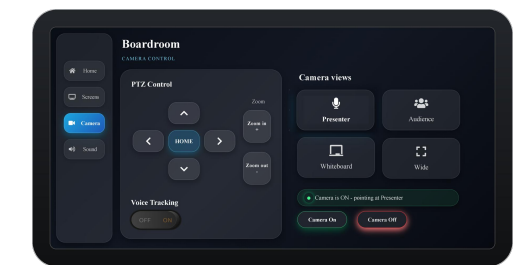

iControl KT069

6.9" touch panel; the whole room, one touch.

The boardroom, installed and in use

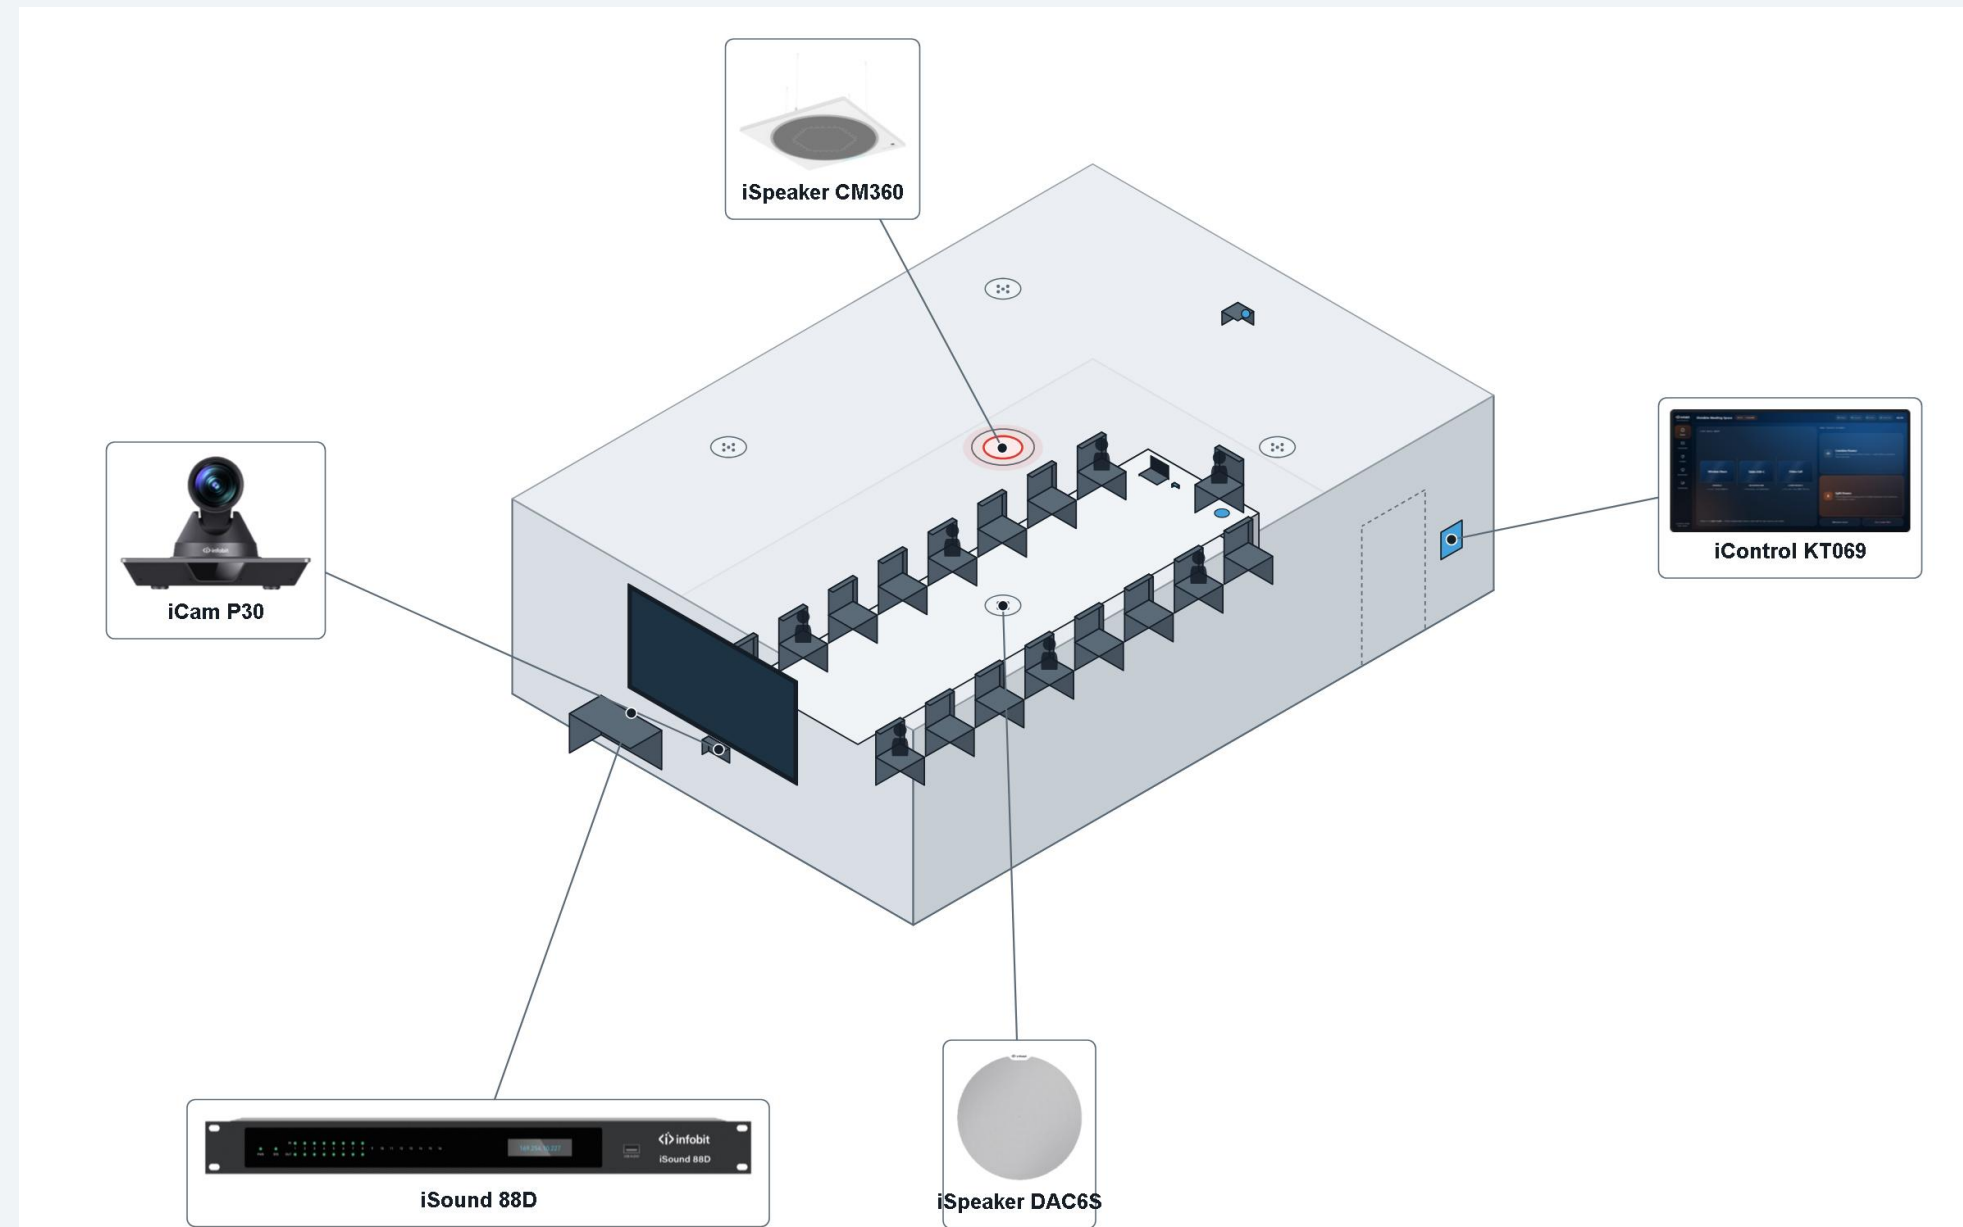

Speak, and the shot is already set.


The panel is the room controller.

It works the same at the hundredth meeting.

This is the room we demonstrate live.


One Brand. One Cable. Open Standards.

 Mic, camera, audio, speakers, panel — one vendor

 PoE speakers: one network cable, no amplifier racks

 Dante audio networking — the standard your integrator knows

 Connects to any UC platform via USB

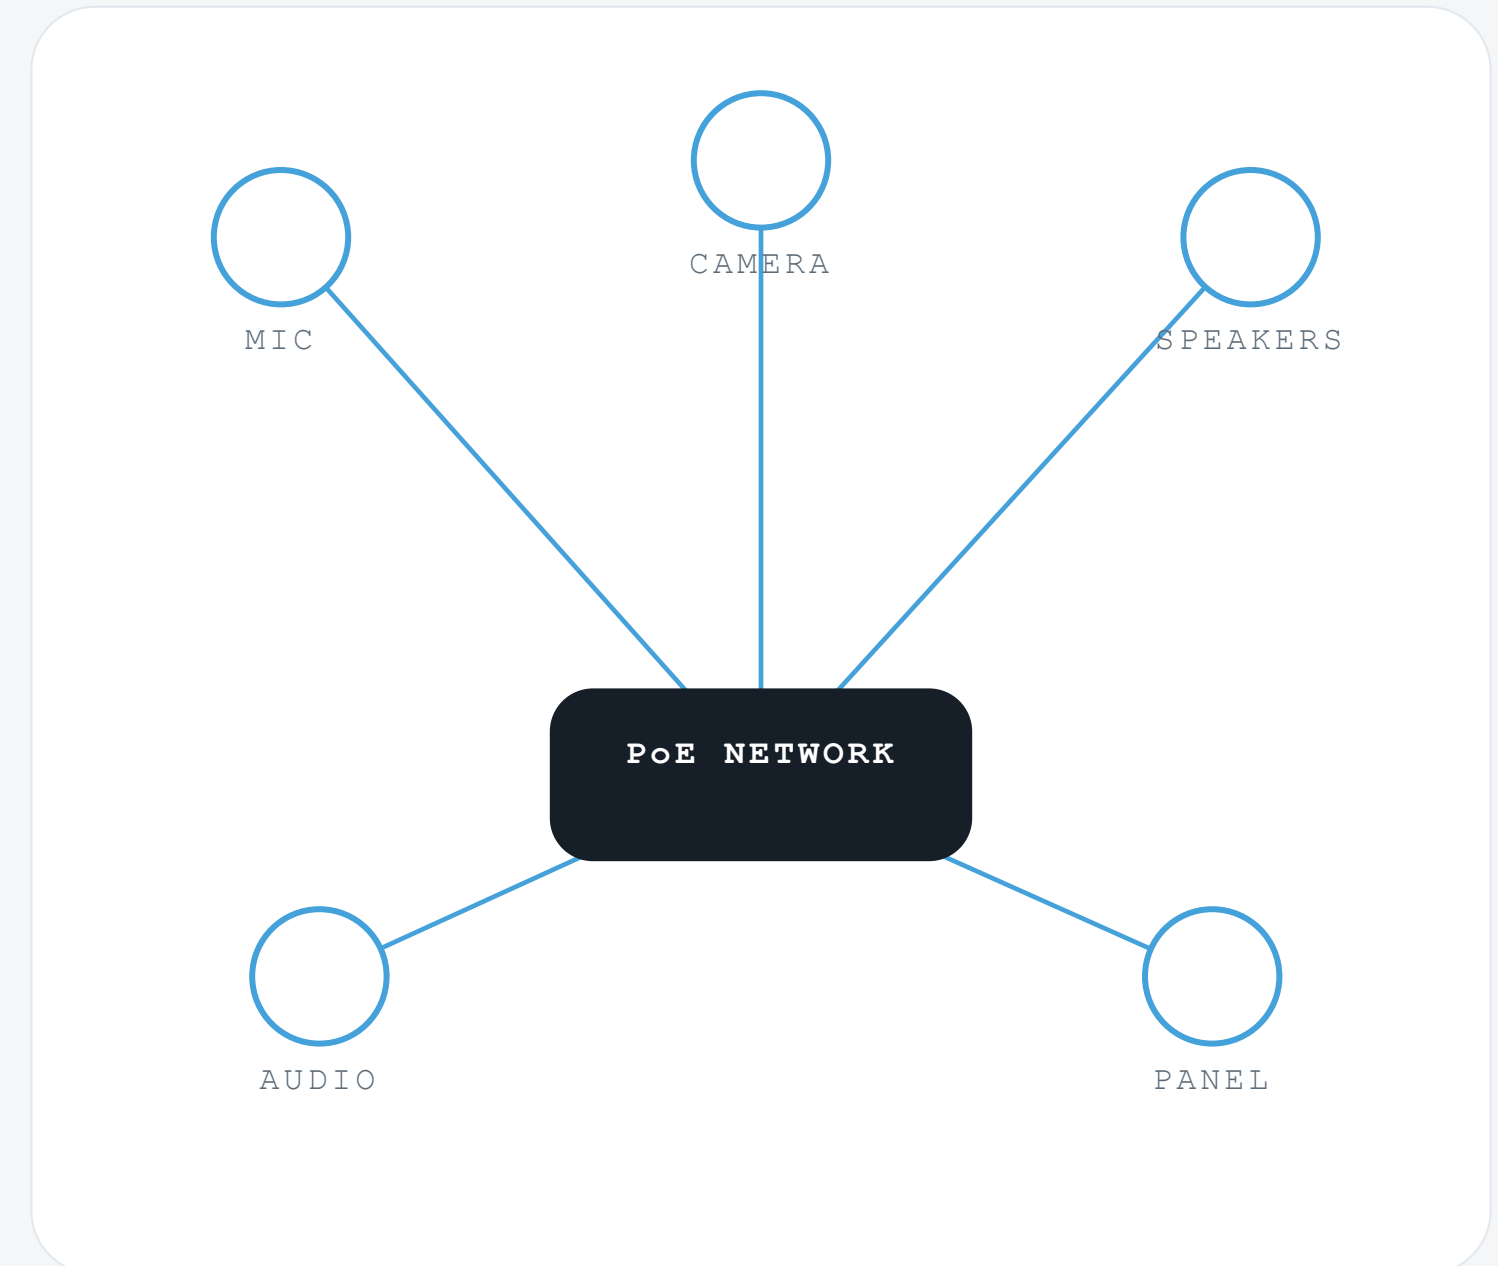



Count the Total Cost, Not the Quote.


Fewer devices, less cabling, faster installation

No amplifier racks, no dedicated equipment room

One support path — no multi-vendor finger-pointing


Same room recipe from 10 rooms to 200

TYPICAL MULTI-VENDOR
ROOM

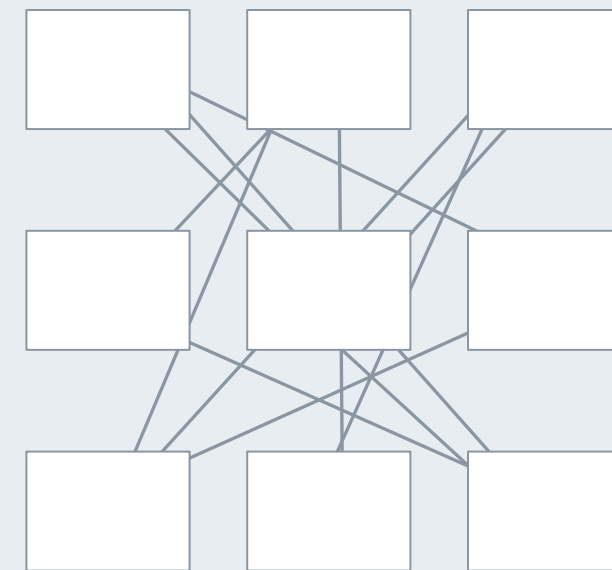

THREE VENDORS. THREE
WARRANTIES.

THE INFOBIT ROOM

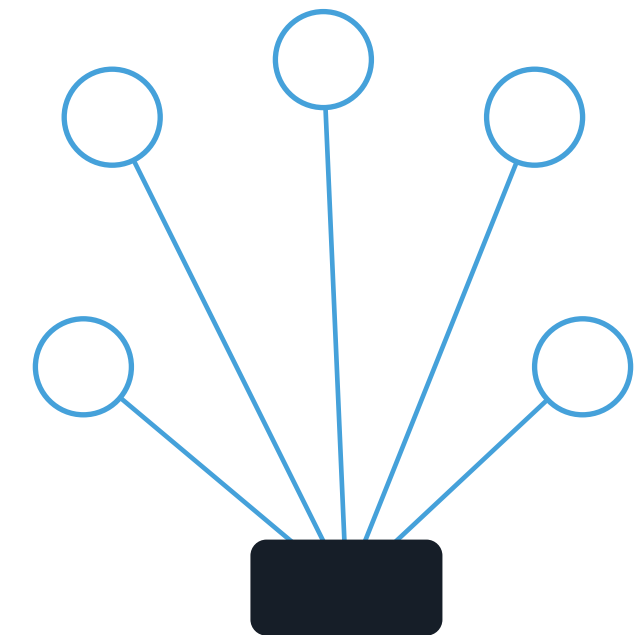

ONE BRAND. ONE SUPPORT PATH.

SEE IT WORKING




Don't Take Our Word. Watch It.

Live demo room — bring your own meeting

Watch the camera find each speaker, instantly

Test it with your own UC platform

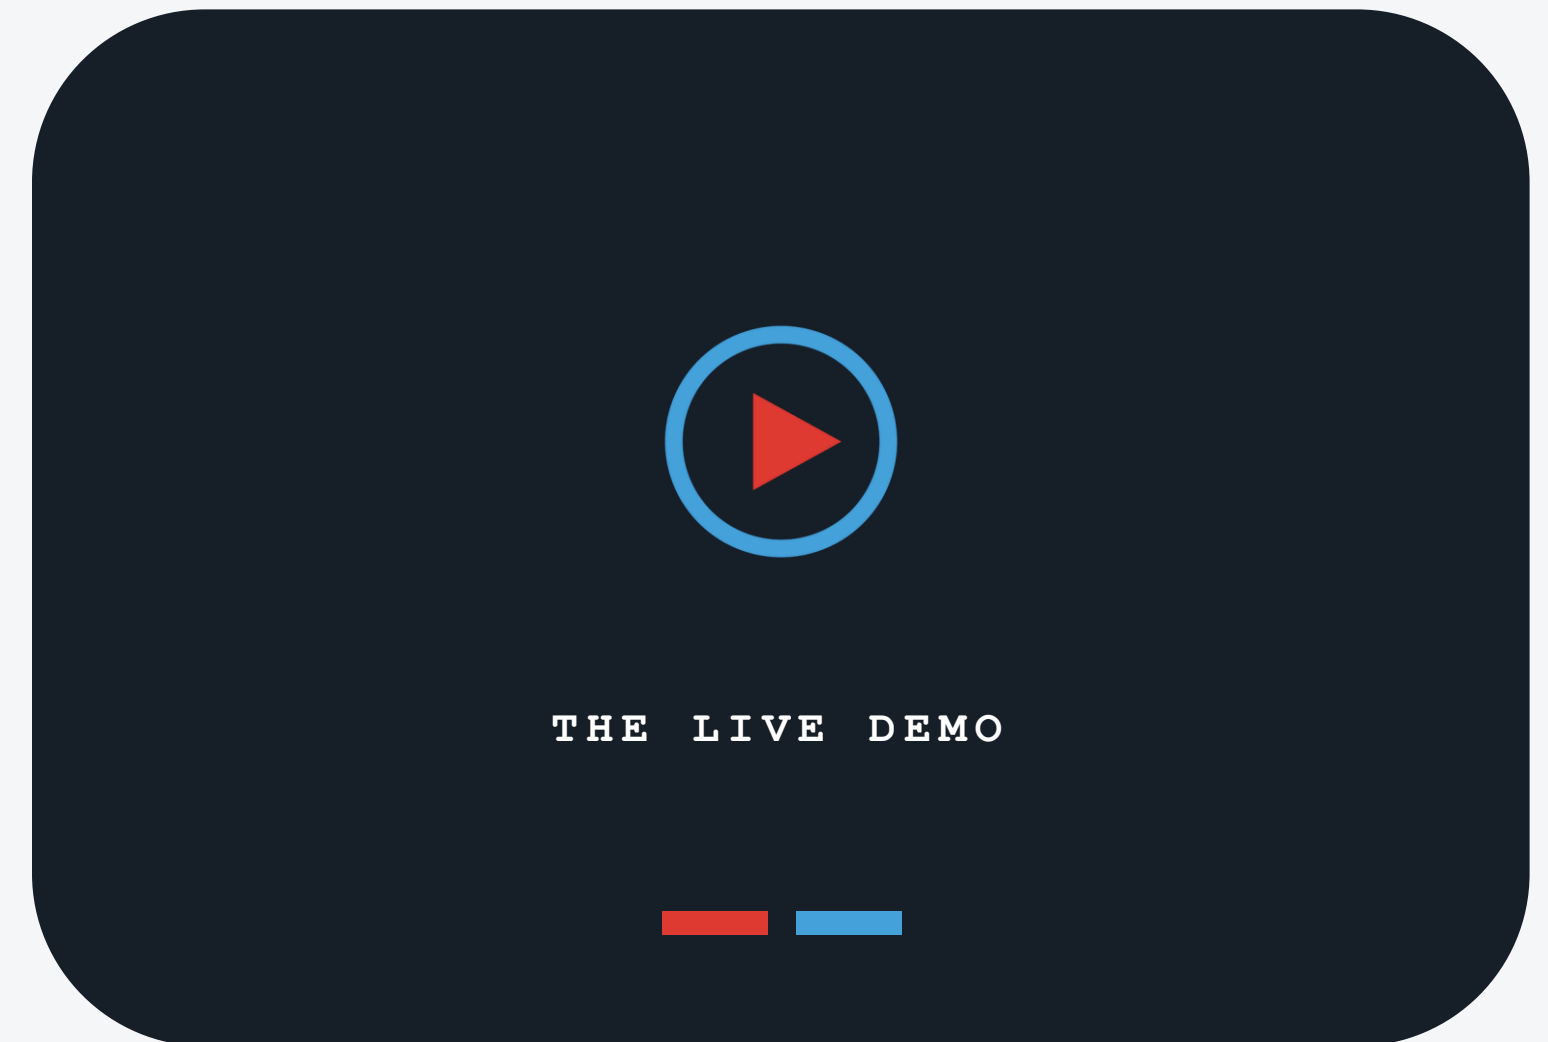

IN OUR DEMO ROOM, OR AT THE NEXT TRADE SHOW





AV Solutions, Engineered End to End.

Complete AV portfolio: video, audio, control, collaboration

Products designed to work as one system

Standards-based: Dante, PoE, VISCA, AVIXA-aligned practice



ONE PORTFOLIO. ONE SYSTEM.





Bring Your Next Meeting to Ours.

Book a live demo of the Infobit Voice-Tracking Room.

`www.infobitav.com` ■ `info@infobitav.com`

PRO AV · AV OVER IP · UC & COLLABORATION



Specifications at a Glance.

COMPONENT	WHAT IT IS	KEY SPECIFICATIONS
iSpeaker CM360	Ceiling beamforming microphone	Locates the active speaker; up to 8 teleconference pickup zones; built-in echo cancellation
iCam P30	PTZ camera	Instant recall of steady, pre-framed shots — one per pickup zone
iSound 88D	Audio processor	8x8 audio processing with Dante networking; USB connection to any UC platform
iSpeaker DAC6S	PoE ceiling speaker	60 W / 8 Ω , 93 dB sensitivity; powered by one network cable (PoE 802.3af/at/bt)
iControl KT069	Touch control panel	6.9" 1440×720 touchscreen; one-touch scenes: Meeting / Presentation / Music
System	Networking & compatibility	Dante audio networking; VISCA camera control; connects to any UC platform via USB