




User Manual

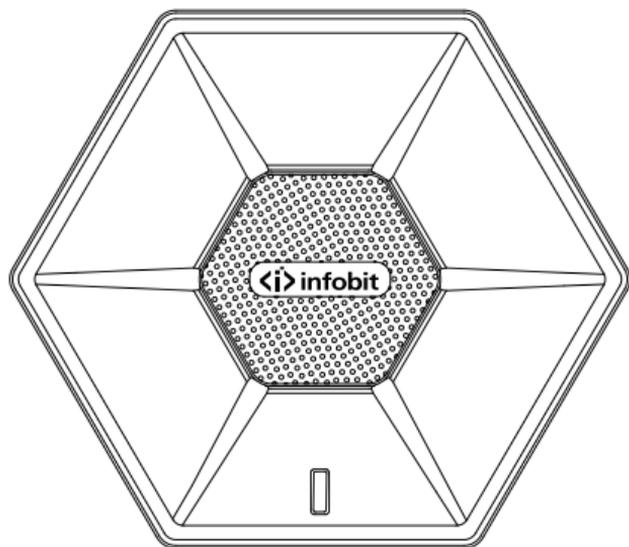

www.infobitav.com info@infobitav.com

Long Distance Wireless Charger

Please read the manual carefully
and manage it properly

Product Introduction

The wireless charger transmitter compatibly for Qi standard device.

Charging distance can reach to 33mm maximum, which can be set below wood, marble, glass and acrylic desktop.

It supports QI wireless charger mobile phones such as iPhone, Samsung, Huawei, LG, MI, etc.

Match with the Receiving Coil for better charging experience.

Specification

Name	Long Distance Wireless Charger
Input	29V 1A
Wireless Output	10W/7.5W/5W
Charging Distance	15-33mm (coil to coil)
Charging Area	φ20mm
Working Frequency	125-135kHz
Dimension	13.6x12x2.1mm
Protection	FOD, OTP,OVP,OCP
Material	ABS+PC
Color	Black

Packing List

 x 1 Wireless charger	 x 1 Mount holder	 x 1 Power adapter
 x 3 Cable clips	 x 6 Fixed screw	 x 1 Magnet
 x 1 Alignment Template	 x 1 Manual	

Optional


 x 1 sticker	+	 x 1 Receiving coil*	OR	 x 1 Sticker and Receiving coil Tow in one
---	----------	---	-----------	---

Function of the receiving coil* :

1. Mark the charging position
2. Improve the charging distance and efficiency

* We recommend iPhone 12 series user to install the receiving coil, or the charging distance could only be 24mm.


Installation Steps

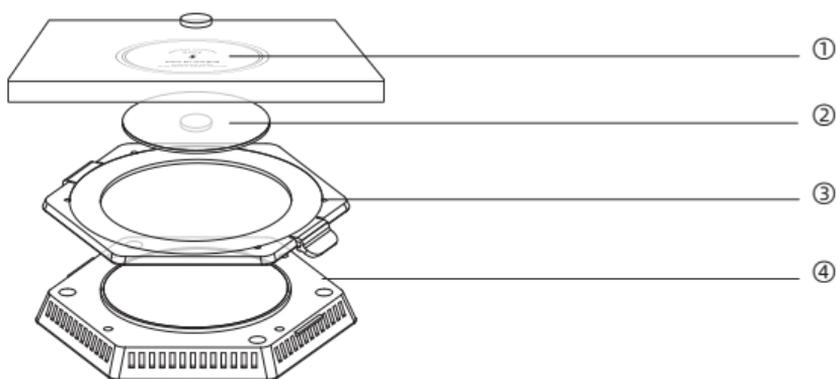

Installation Steps

1. Select the position for pasting the sticker or the receiving coil. Place one magnet on the central.
2. Put the alignment template beneath the table and align the magnet with the alignment magnet.
3. Stick the mount. Fix the screws if needed.
4. Lock the charger into the mount.
5. Fix the cable clips if needed.
6. Connect the plug, then charging can start.

Display

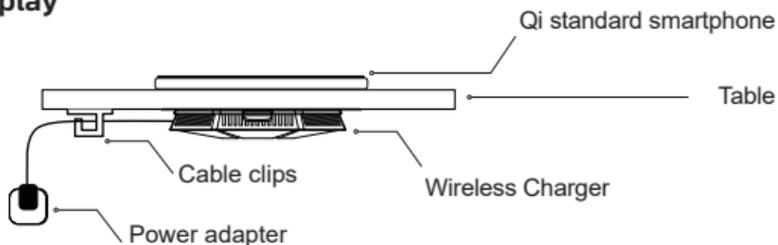

Product Light Indication

Indicator light Color	Red	Green	Flasing Red
Condition	Standby	Charging	FOD

Cautions

1. Install the charger according to the instruction.
2. Do not install the charger under any metal desk.
3. Do not place any metal objects, credit card and ID cards on the charging area. Or it might activate the FOD function and cause the device display flashing situation.
4. Keep away from humidity and heat.
5. The best working temperature should be 20℃ ~30℃.
6. Do not cover the fan when using.
7. Do not try to disassemble, repair or remold the product by yourself.
8. Unplug this device when unused for long periods of time.
9. Do not drop, squeeze or puncture the device.
10. Cut off the power before cleaning the charger.
11. Keep it beyond the reach of children.
12. Please use the original adapter to ensure the charging effects.
13. Only supports Qi standard wireless charging mobile phones.

14. Charging time depends on battery capacity, phone input specifications, current phone energy consumption, phone position on the wireless charger, charging distance, etc.

15.If mobile phones cannot be charged due to other factors, please move the phone out of the charging area and try again.

